

Connecting the Power Cable to the 7100 Unit and the Vehicle

You will need a small screw driver to connect the power cable to the tracking unit. Loosen the 2 screws on the side of the unit. Insert the wires as shown in the picture below. Then tighten the screws. Make sure the wires are firmly connected so they do not come loose.

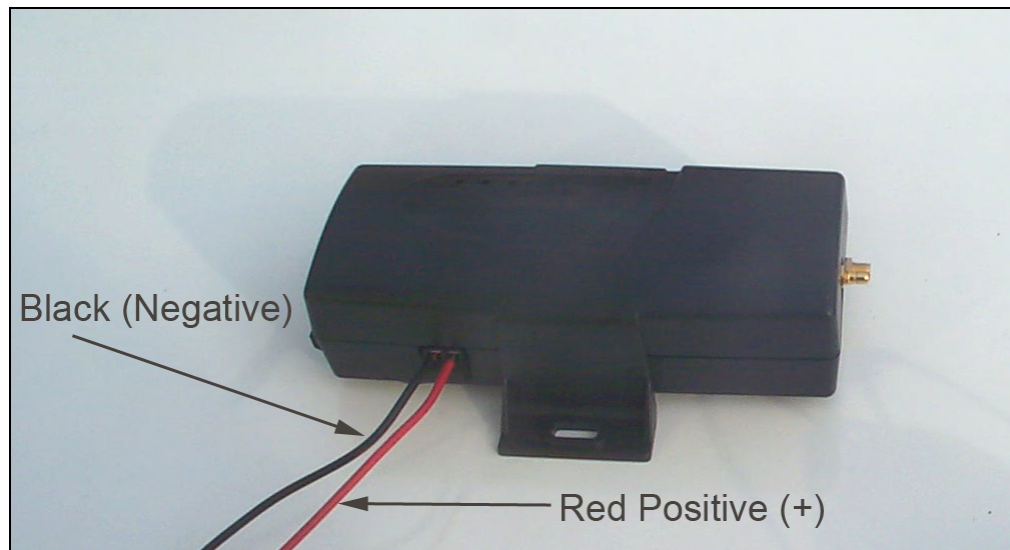


Figure 1.0 - Power Connection to the LandAirSea 7100

After you have connected the power cable to the tracking unit, take the fuse out of the fuse holder. The fuse holder is part of the power cable. This is VERY important, so make sure you do not forget to take the fuse out of the fuse holder.

Now connect the other end of the power cable to either the battery of the vehicle or the fuse box. **MAKE SURE IT IS CONNECTED TO A CONSTANT POWER SOURCE. THE UNIT NEEDS TO HAVE POWER EVEN WHEN THE VEHICLE IS TURNED OFF.** You can also connect it to any other source on the car that provides 12 volts of power. See the Figure below which shows the connection to the battery.

